Radon Measurement Report

PROPERTY INFORMATION

Property Name:	[redacted]
Address:	[redacted]
Building Type:	House
Foundation Type:	Crawlspace
Radon Mitigation System:	None

MEASUREMENT SUMMARY

	MINIMUM	AVERAGE	MAXIMUM
LEVEL OF RADON	0.8 pCi/L	2.5 pCi/L	5.4 pCi/L
TEMPERATURE	52.2 °F	58.6 °F	65.5 °F
HUMIDITY	37.0 %rH	42.7 %rH	50.5 %rH
ATMOSPHERIC PRESSURE	25.7578 inHg	25.8310 inHg	25.9527 inHg

MOTION EVENTS

No motion events were detected during this measurement.

RADON LEVEL & AIR PRESSURE GRAPHS

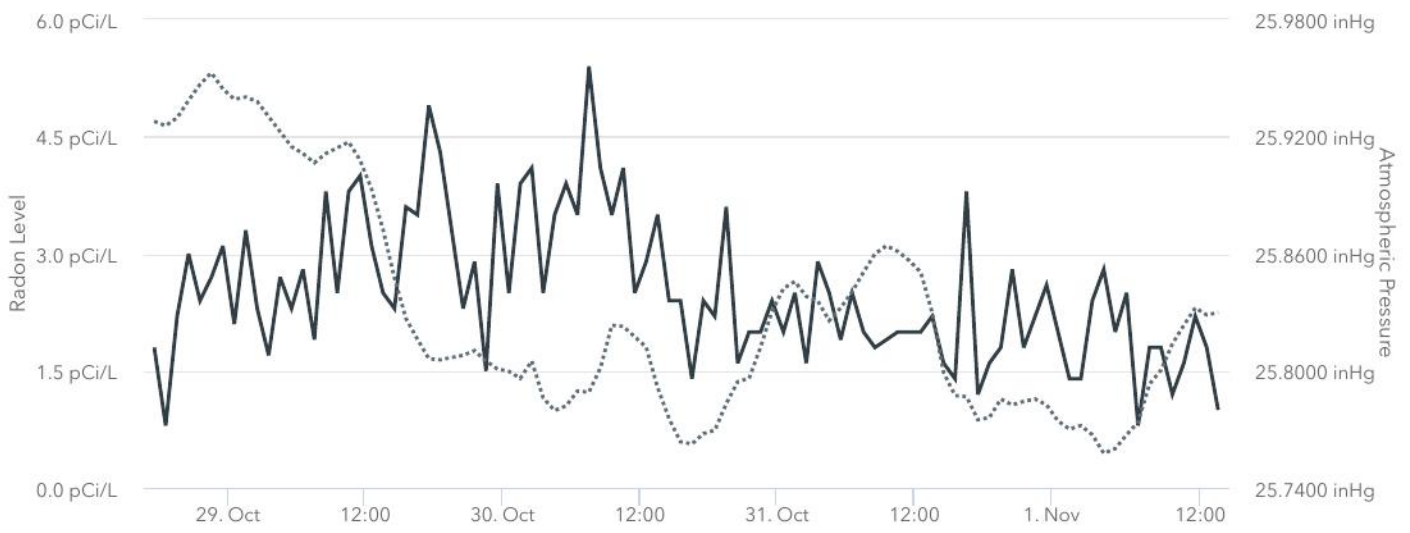

TEMPERATURE & HUMIDITY GRAPHS

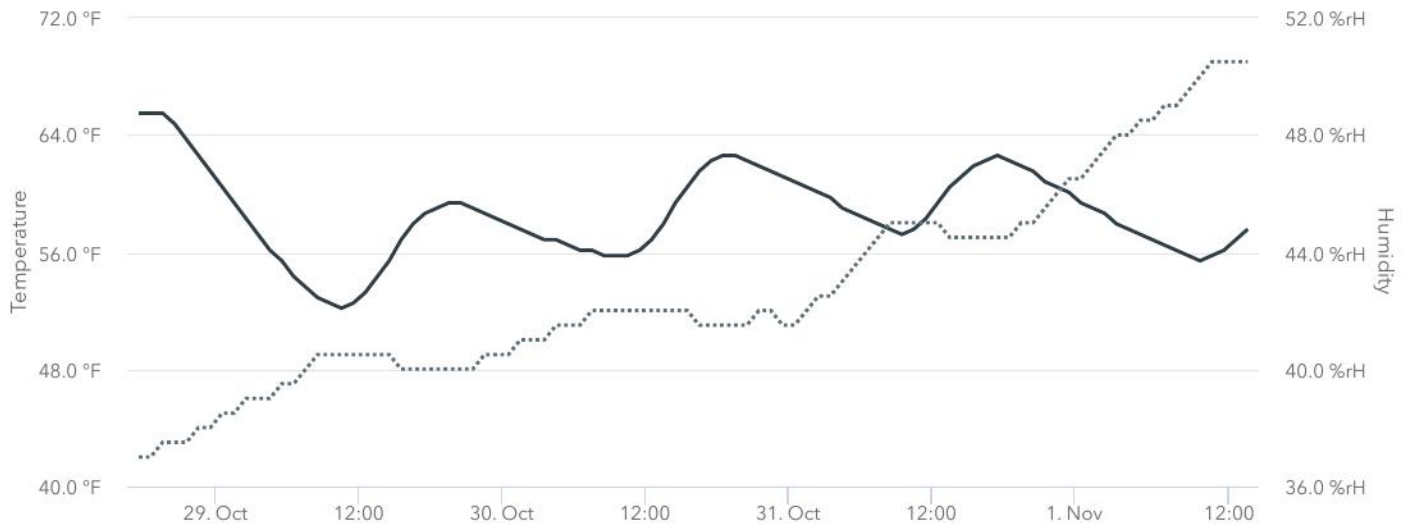

COMPANY INFORMATION

Name:	Bob Parmenter
Phone Number:	7758425916
Email:	[redacted]
Address:	[redacted]

CERTIFICATIONS

Name:	Number:	Expiration Date:
Certified Radon Measurement Professional	116246	08/01/2028

Recommended Actions

≥2.0 AND <4.0 PCI/L - W/O MITIGATION SYSTEM

The measured average radon level is below the Environmental Protection Agency (EPA) Action Level of 4.0 pCi/L. However, since the measured average radon level is at least half the Action Level, the EPA suggests that homeowners consider having a radon mitigation system installed. The EPA recommends having this building retested at least once every 5 years to determine if a radon mitigation system is recommended at a later date since radon levels can change over time. If a radon mitigation system is installed, the EPA recommends having this building retested at least once every 2 years to ensure the system remains effective. Performing follow-up tests during the heating season is recommended since this is when radon levels tend to be the highest. A 12-month long test, or continuous monitoring, will most accurately reflect radon exposure throughout the year.

RADON PROFESSIONAL'S SIGNATURE

This report is certified by Bob Parmenter.

Bob Parmenter

Electronic Signature

2026-11-02